


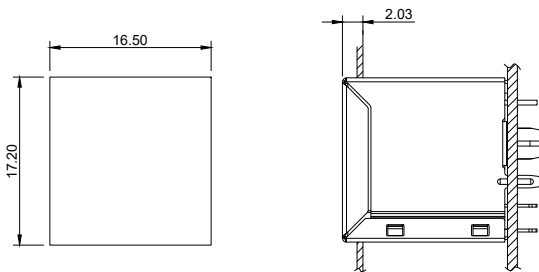





Housing: thermoplastic UL 94 V-0  
 Shield: brass Ni plating  
 Contact: copper alloy, mating area 6u" Au plating  
 Durability: 750 cycles min.  
 Operation temperature: -40°C~+85°C



Recommended PCB Layout



Recommended Panel Opening

 <b>E.S. GLOBAL TOP</b>		UNIT	mm
		REVISION	A
PRODUCT	RJ45 Top Entry Jack with LED		TOLERANCES
DWG NO.	EZC0745-18S21-01	PART NO.	± 0.25 unless otherwise specified
PROJECTION	SCALE	SHEET	1 OF 1