

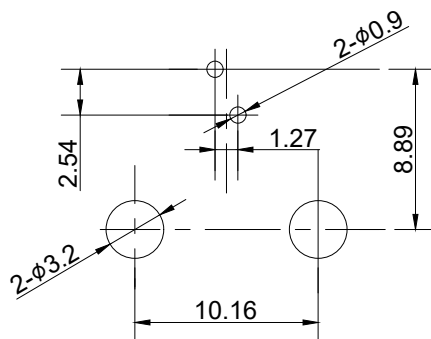



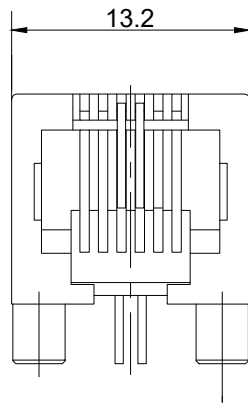

RECOMMENDED PCB LAYOUT

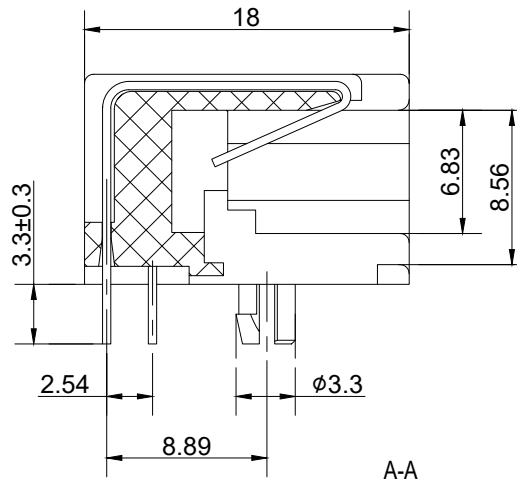

NOTES:	
<u>MECHANICAL</u>	
HOUSING & INSERT	: THERMOPLASTIC GLASS
	: FIBER FILLED UL94V-0 BLACK
CONTACT	: PHOSPHOR BRONZE
PLATING	: GOLD PLATING AT CONTACT AREA NICKEL 30U MIN. OVER ALL
DURABILITY	: 750 CYCLES MIN.
MATING/UNMATING FORCE	: 30N / 3.06 KG MAX.
RETENTION STRENGTH	: 30N MIN. FOR 60S±5S
<u>ELECTRICAL</u>	
VOLTAGE RATING	: 125 VAC RMS
CURRENT RATING	: 1.5 AMP
CONTACT RESISTANCE	: 20 mΩ MAX.
INSULATION RESISTANCE	: 1000 MΩ MIN. AT 500V DC
DIELECTRIC STRENGTH	: 1000V AC OR 1500V DC RMS AT 0.5mA 50 Hz / 60Hz FOR ONE MINUTE
<u>ENVIRONMENTAL</u>	
STORAGE	: -40°C TO +85°C
OPERATION	: -40°C TO +85°C

 <i>E.S. GLOBAL TOP</i>				UNIT	mm
				REVISION	00
PRODUCT				TOLERANCES 00~15±0.15 15~30±0.20 30~ ±0.25 ANGLES ± 1°	
RJ11 1X1 SIDE ENTRY JACK					
DWG NO.		PART NO.			
EZC0811-16N11-03					
PROJECTION	SCALE		SHEET	1 OF 1	
					
5				6	