
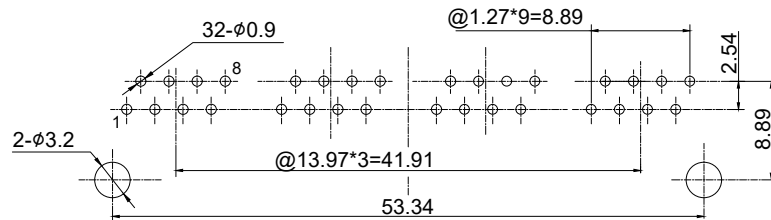



NOTES:  
**MECHANICAL**  
 HOUSING&INSERT : PBT UL94V-0  
 CONTACT : PHOSPHOR BRONZE  
 PLATING : GOLD PLATING OVER NICKEL  
 MATING/UNMATING FORCE : 30N MAX.  
 RETENTION STRENGTH : 50N FOR 60S±5S  
 DURABILITY : 750 CYCLES MIN.

**ELECTRICAL**  
 VOLTAGE RATING : 150V AC RMS  
 CURRENT RATING : 1.5 AMPS@25°C  
 CONTACT RESISTANCE : 20 mΩ MAX.  
 INSULATION RESISTANCE : 1000 MΩ MIN. @500V DC  
 WITHSTAND VOLTAGE : CONTACT TO CONTACT 1000V DC OR AC PEAK, CONTACT TO SCREEN AND TEST PANEL 1500V DC OR AC PEAK @0.5mA 50Hz or 60Hz ONE MINUTE

**ENVIRONMENTAL**  
 STORAGE : -40°C ~ +85°C  
 OPERATION : -40°C ~ +85°C

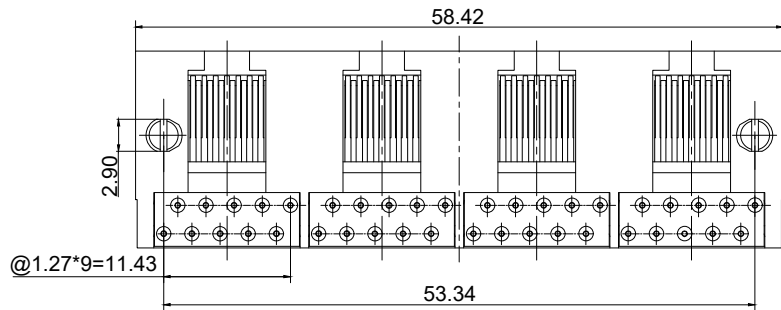

RECOMMENDED PCB LAYOUT

 <b>E.S. GLOBAL TOP</b>		UNIT	mm
		REVISION	07
PRODUCT		RJ45 1X4 SIDE ENTRY JACK	
DWG NO.		PART NO.	
EZC1145-41N11-03			
PROJECTION	SCALE	SHEET	1 OF 1
