

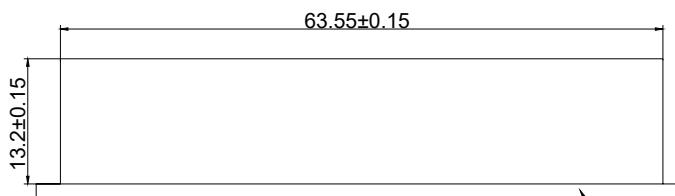


RECOMMENDED PCB LAYOUT



RECOMMENDED PANEL OPENING



NOTES:
 MECHANICAL HOUSING&INSERT : THERMOPLASTIC GLASS FIBER FILLED UL 94V-0 BLACK
 CONTACT : PHOSPHOR BRONZE
 PLATING : CONTACT AREA SELECTIVE GOLD PLATING SOLDER AREA MATTE TIN PLATING 150U" MIN. NICKEL PLATING 50U" MIN. OVERALL

MATING/UNMATING FORCE : 30N MAX.
 RETENTION STRENGTH : 50N FOR 60S±5S
 DURABILITY : 750 CYCLES

ELECTRICAL
 VOLTAGE RATING : 150V AC RMS
 CURRENT RATING : 1.5 AMPS @25°C
 CONTACT RESISTANCE : 20 mΩ MAX.
 INSULATION RESISTANCE : 1000 MΩ MIN. @500V DC
 DIELECTRIC STRENGTH : 1000V DC OR AC PEAK CONTACT TO CONTACT OR 1500 DC OR AC PEAK CONTACT TO SCREEN AND TEST PANEL @0.5mA 50Hz / 60Hz ONE MINUTE

ENVIRONMENTAL STORAGE : -40°C ~ +85°C
 OPERATION : -40°C ~ +85°C

		UNIT	mm
		REVISION	02
PRODUCT		TOLERANCES	
RJ45 1X4 SIDE ENTRY JACK WITH LED		00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25	
DWG NO.	PART NO.	ANGLES ± 1°	
EZC1145-48N21-02			
PROJECTION	SCALE	SHEET	1 OF 1