

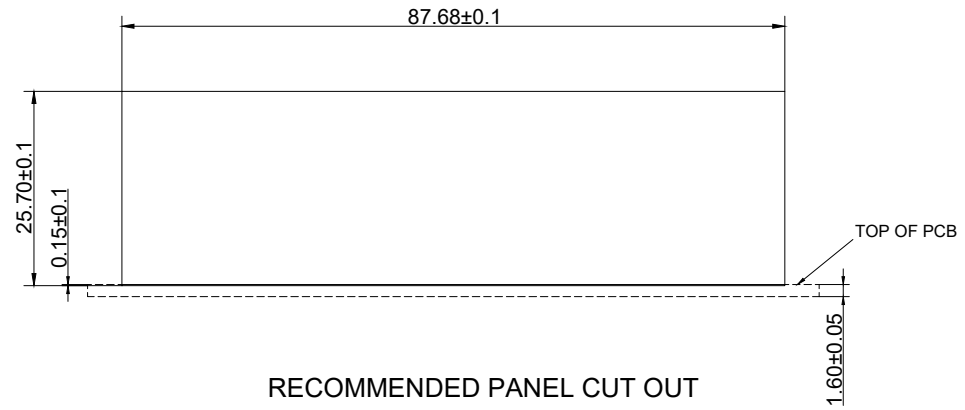



NOTES:
MECHANICAL
 HOUSING & INSERT : THERMOPLASTIC GLASS
 : FIBER FILLED UL 94V-0 BLACK
 CONTACT MATERIAL : PHOSPHOR BRONZE
 CONTACT PLATING : CONTACT AREA- SELECTIVE GOLD
 : PLATING, TAILS PLATING TIN OVER
 : NICKEL
 SHIELD : BRASS PLATED NICKEL FOR ALL
 RETENTION STRENGTH : 30N MAX.
 MATING/UNMATING FORCE : 50N FOR 60S±5S
 DURABILITY : 750 CYCLES MIN.


ELECTRICAL
 VOLTAGE RATING : 150 VAC RMS
 CURRENT RATING : 1.5 AMP
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.
 INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
 DIELECTRIC STRENGTH : CONTACT TO CONTACT 1000 V
 : DC OR AC PEAK, CONTACT TO
 : SCREEN AND TEST PANEL 1500
 : V DC OR AC PEAK @ 0.5mA 50 Hz
 : OR 60 Hz A MINUTE

ENVIRONMENTAL
 STORAGE TEMPERATURE : -40°C ~ +85°C
 OPERATION TEMPERATURE : -40°C ~ +85°C



 E.S. GLOBAL TOP		UNIT	mm
		REVISION	04
PRODUCT		TOLERANCES	
RJ45 2X6 SIDE ENTRY JACK WITH LED		00~15 ± 0.15 15~30 ± 0.20 30~ ± 0.25	
DWG NO.	PART NO.	ANGLES ± 1°	
EZC1445-268S21-01			
PROJECTION	SCALE	SHEET	1 OF 2
			

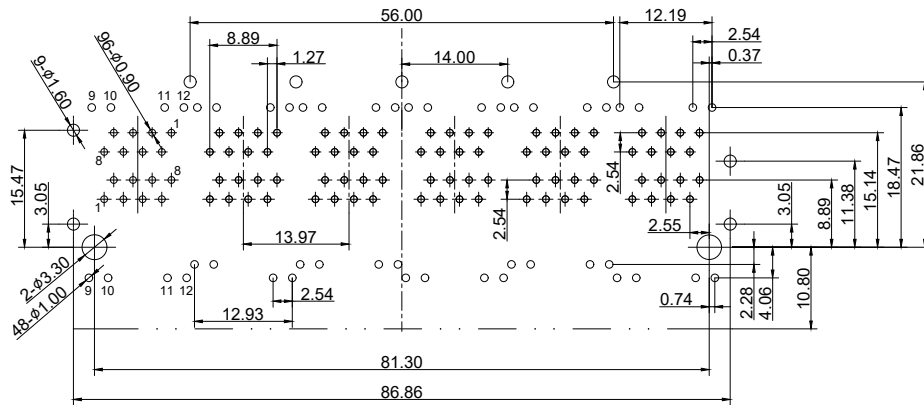

RECOMMENDED PANEL CUT OUT



RECOMMENDED PCB LAYOUT

 E.S. GLOBAL TOP		UNIT	mm
		REVISION	04
PRODUCT		RJ45 2X6 SIDE ENTRY JACK WITH LED	
DWG NO.		PART NO.	
EZC1445-268S21-01			
PROJECTION	SCALE	SHEET	2 OF 2
			

TOLERANCES
 00~15 ± 0.15
 15~30 ± 0.20
 30~ ± 0.25
 ANGLES ± 1°