

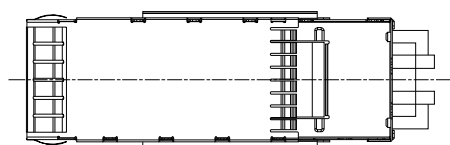


DETAIL A

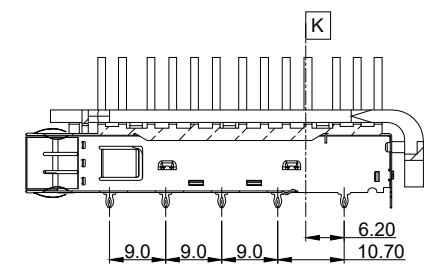


- NOTES:
- CAGE : COPPER ALLOY 0.762µm Min.
NICKEL PLATING OVER ALL
 - EMI SPRING : BERYLLIUM COPPER 0.762µm Min.
NICKEL PLATING OVER ALL
 - HEAT SINK : COPPER
 - HEAT SINK CLIP : STEEL

		UNIT	mm
		REVISION	X1
PRODUCT		QSFP+ 1X1 CAGE	
DWG NO.	EZQS-1PH1-03	PART NO.	
PROJECTION		SCALE	SHEET
			1 OF 2
		TOLERANCES	.0 ± 0.20 .00 ± 0.10 .000 ± 0.05 ANGLES ± 2°

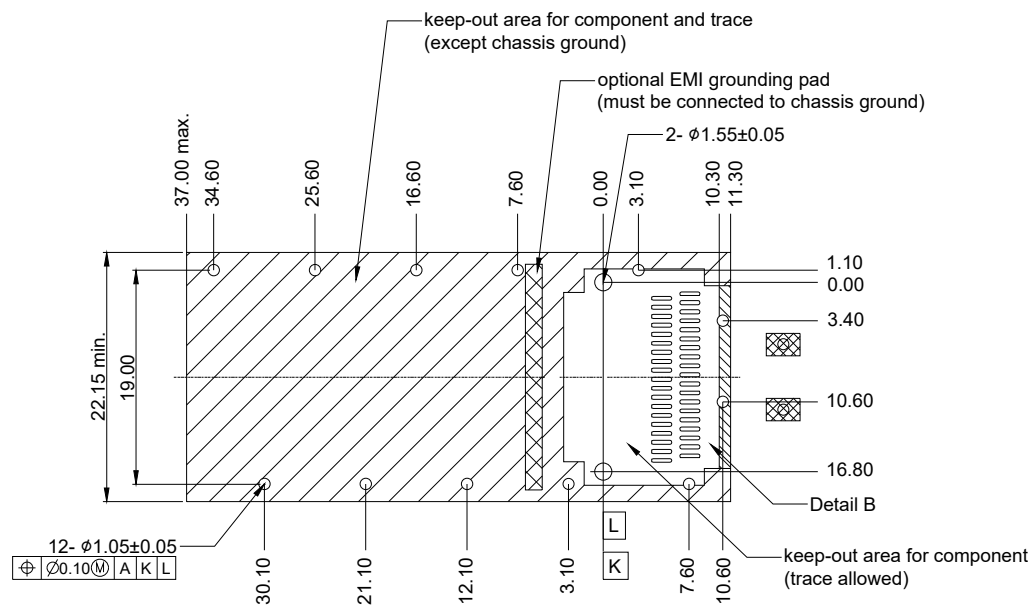


RECOMMENDED PCB LAYOUT


NOTES:
 SEE QSFP MSA SPECIFICATION FOR BEZEL LOCATION TOLERANCE
 DATUM -A- : TIP SURFACE OF HOST BOARD
 PER MSA FINISHED HOLE SIZE
 (AFTER PLATING)
 DATUM -K- : HOST BOARD THRE HOLE #1 TO
 ACCEPT CONNECTOR GUIDE POST
 PER MSA
 DATUM -L- : HOST BOARD THRE HOLE #2 TO
 ACCEPT CONNECTOR GUIDE POST
 PER MSA
 DATUM -T- : HARD STOP ON CAGE PER MSA

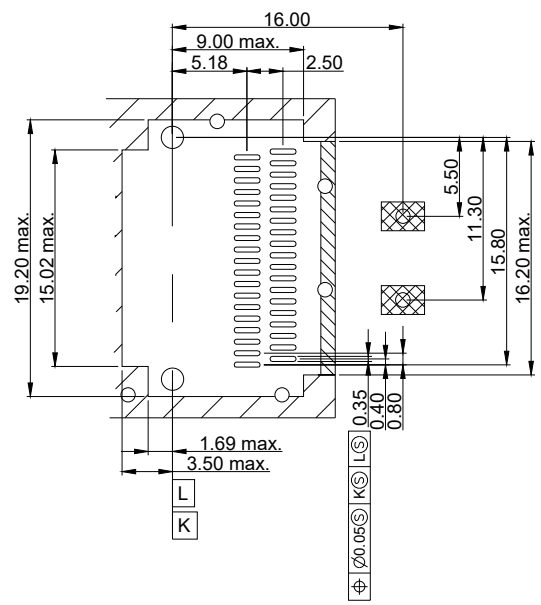

DETAIL B

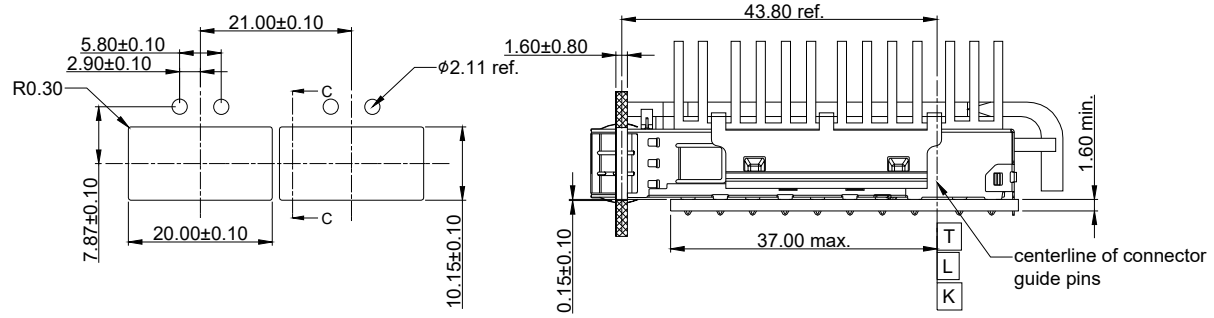

RECOMMENDED PANEL OPENING

 E.S. GLOBAL TOP		UNIT	mm
		REVISION	X1
PRODUCT		QSFP+ 1X1 CAGE	
DWG NO.		PART NO.	
EZQS-1PH1-03			
PROJECTION	SCALE	SHEET	TOLERANCES .0 ± 0.20 .00 ± 0.10 .000 ± 0.05 ANGLES ± 2°
		2 OF 2	