




Front View

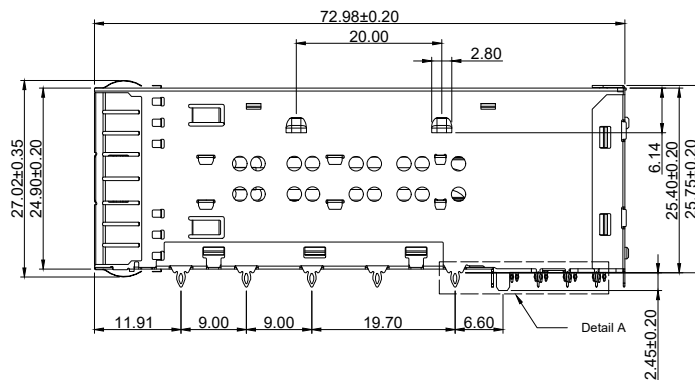



Rear View

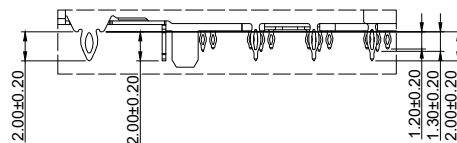

Detail A

Cage: copper alloy nickel plating
EMI spring: beryllium copper nickel plating
Light pipe: polycarbonate
Connector housing: thermoplastic black UL 94V-0
Terminal: copper alloy, gold plating over nickel in contact area, tin plating over nickel in solder area

			UNIT	mm
			REVISION	A
PRODUCT			TOLERANCES	
EZQS10-21N21-01			.x ± 0.25	
EZQS10-21N21-01			.xx ± 0.13	
EZQS10-21N21-01			.xxx ± 0.05	
Angles ±2°				
PROJECTION	SCALE	SHEET	1 OF 2	

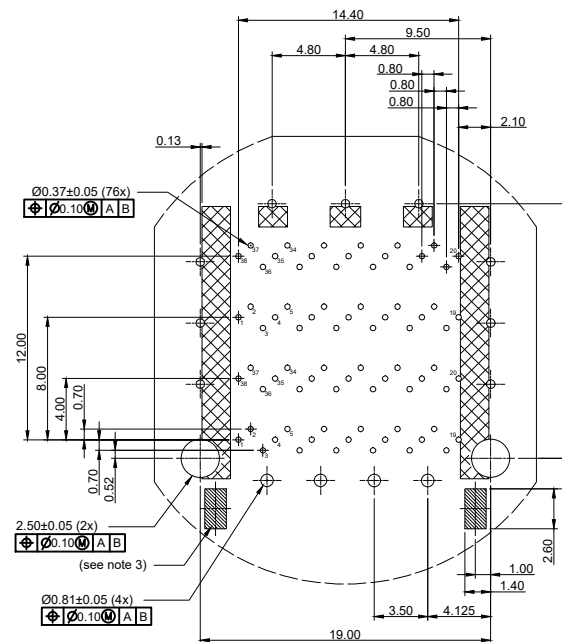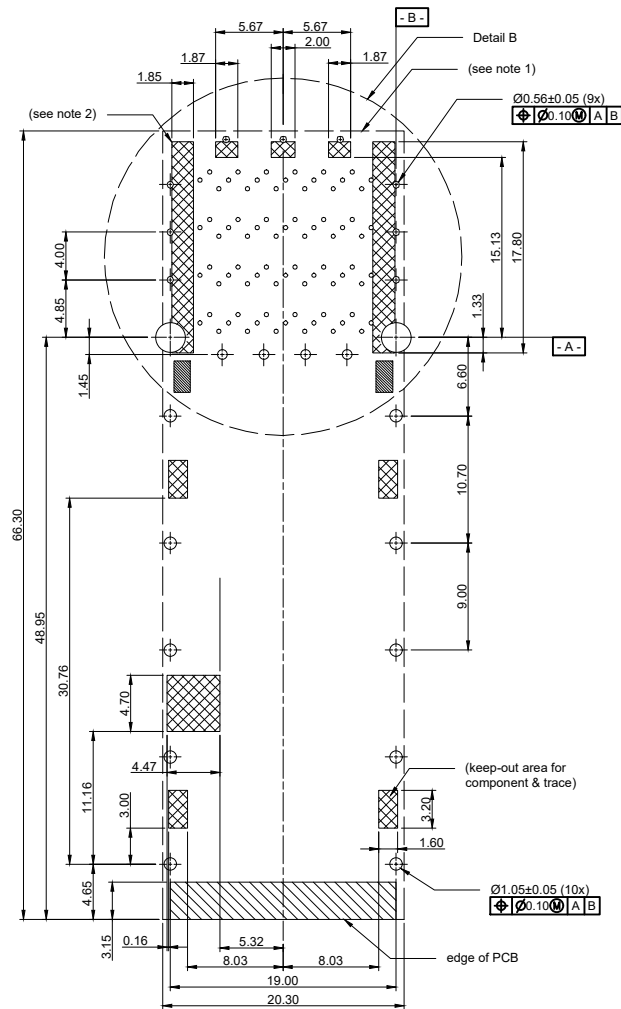

Detail B

Note:

1. the indicated area is considered as keep-out area for components.
2. the indicated areas are in contact with or in close proximity to connector housing, and are considered trace free.
3. the indicated areas and 0.8mm vertically above are for chip type SMD LED.

		UNIT	mm
		REVISION	A
PRODUCT		TOLERANCES	
QSFP28 2x1 Cage		.x ± 0.25 .xx ± 0.13 .xxx ± 0.05 Angles ±2°	
DWG NO.	EZQS10-21N21-01	PART NO.	
PROJECTION	SCALE	SHEET	2 OF 2