
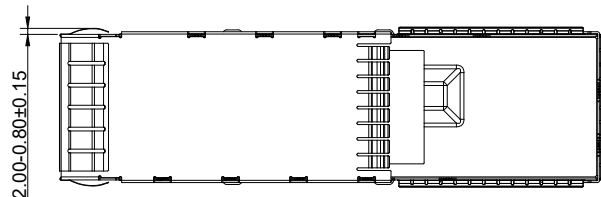



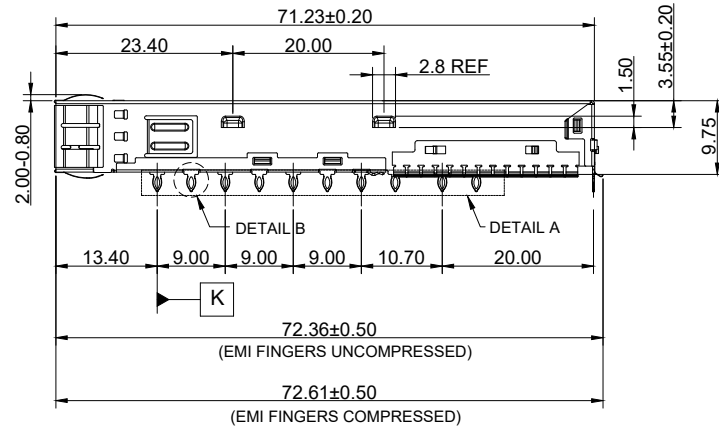

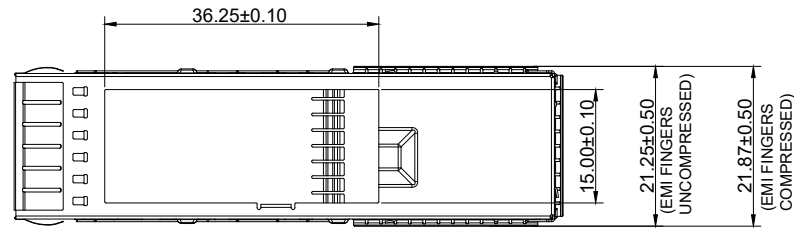
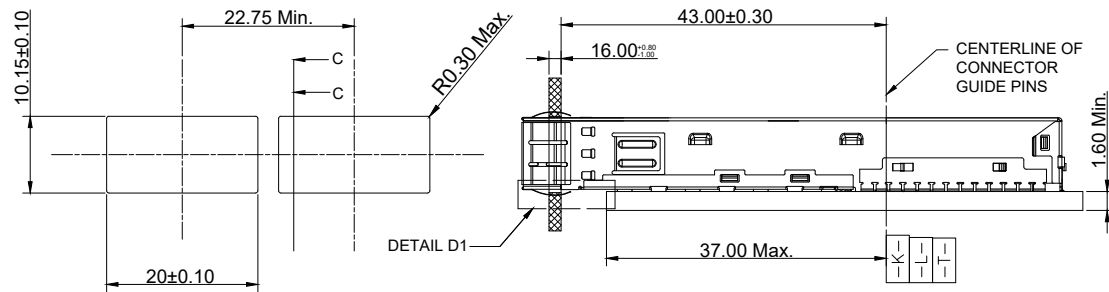


NOTES:
 CAGE : STAINLESS STEEL
 EMI SPRING : BERYLLIUM COPPER
 PLATING : 30-80u" NICKEL OVER ALL
 FOR EMI SPRING

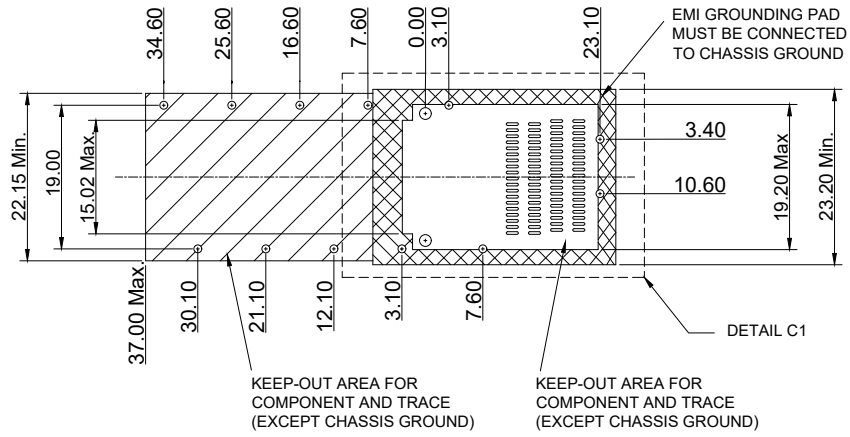


		UNIT	mm
		REVISION	X
PRODUCT		QSFP-DD 1X1 CAGE	
DWG NO.		PART NO.	
EZQDD-1PN1-01			
PROJECTION	SCALE	SHEET	1 OF 3
		TOLERANCES	
		.0 ± 0.25	
		.00 ± 0.13	
		.000 ± 0.05	
		ANGLES ± 2°	






RECOMMENDED PCB LAYOUT FOR SINGLE SIDE SECTION C-C

- NOTES:
 SEE QSFP MSA SPECIFICATION FOR BEZEL LOCATION TOLERANCE
 DATUM -A- : TIP SURFACE OF HOST BOARD
 PER MSA FINISHED HOLE SIZE
 (AFTER PLATING)
 DATUM -K- : HOST BOARD THREE HOLE #1 TO
 ACCEPT CONNECTOR GUIDE POST
 PER MSA
 DATUM -L- : HOST BOARD THREE HOLE #2 TO
 ACCEPT CONNECTOR GUIDE POST
 PER MSA
 DATUM -T- : HARD STOP ON CAGE PER MSA

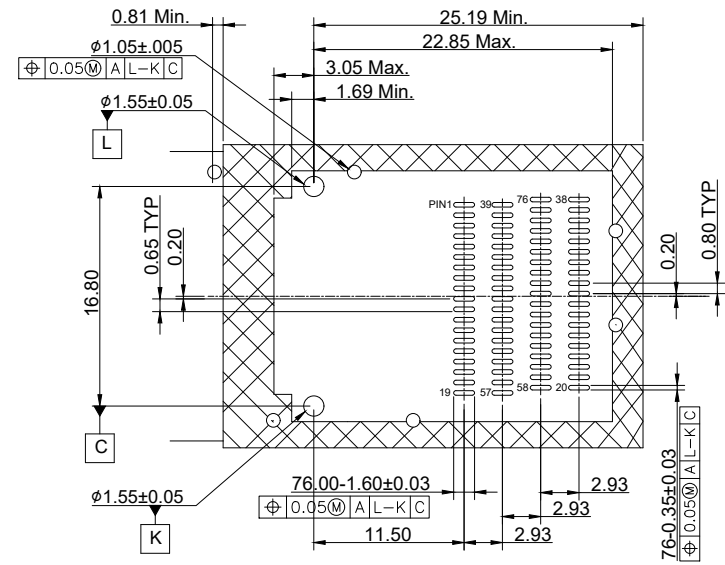

DETAIL C1

 E.S. GLOBAL TOP		UNIT	mm
		REVISION	A
PRODUCT		QSFP-DD 1X1 CAGE	
DWG NO.		PART NO.	
EZQDD-1PN1-01			
PROJECTION	SCALE	SHEET	2 OF 3
			
		TOLERANCES	
		.0 ± 0.25	
		.00 ± 0.13	
		.000 ± 0.05	
		ANGLES ± 2°	

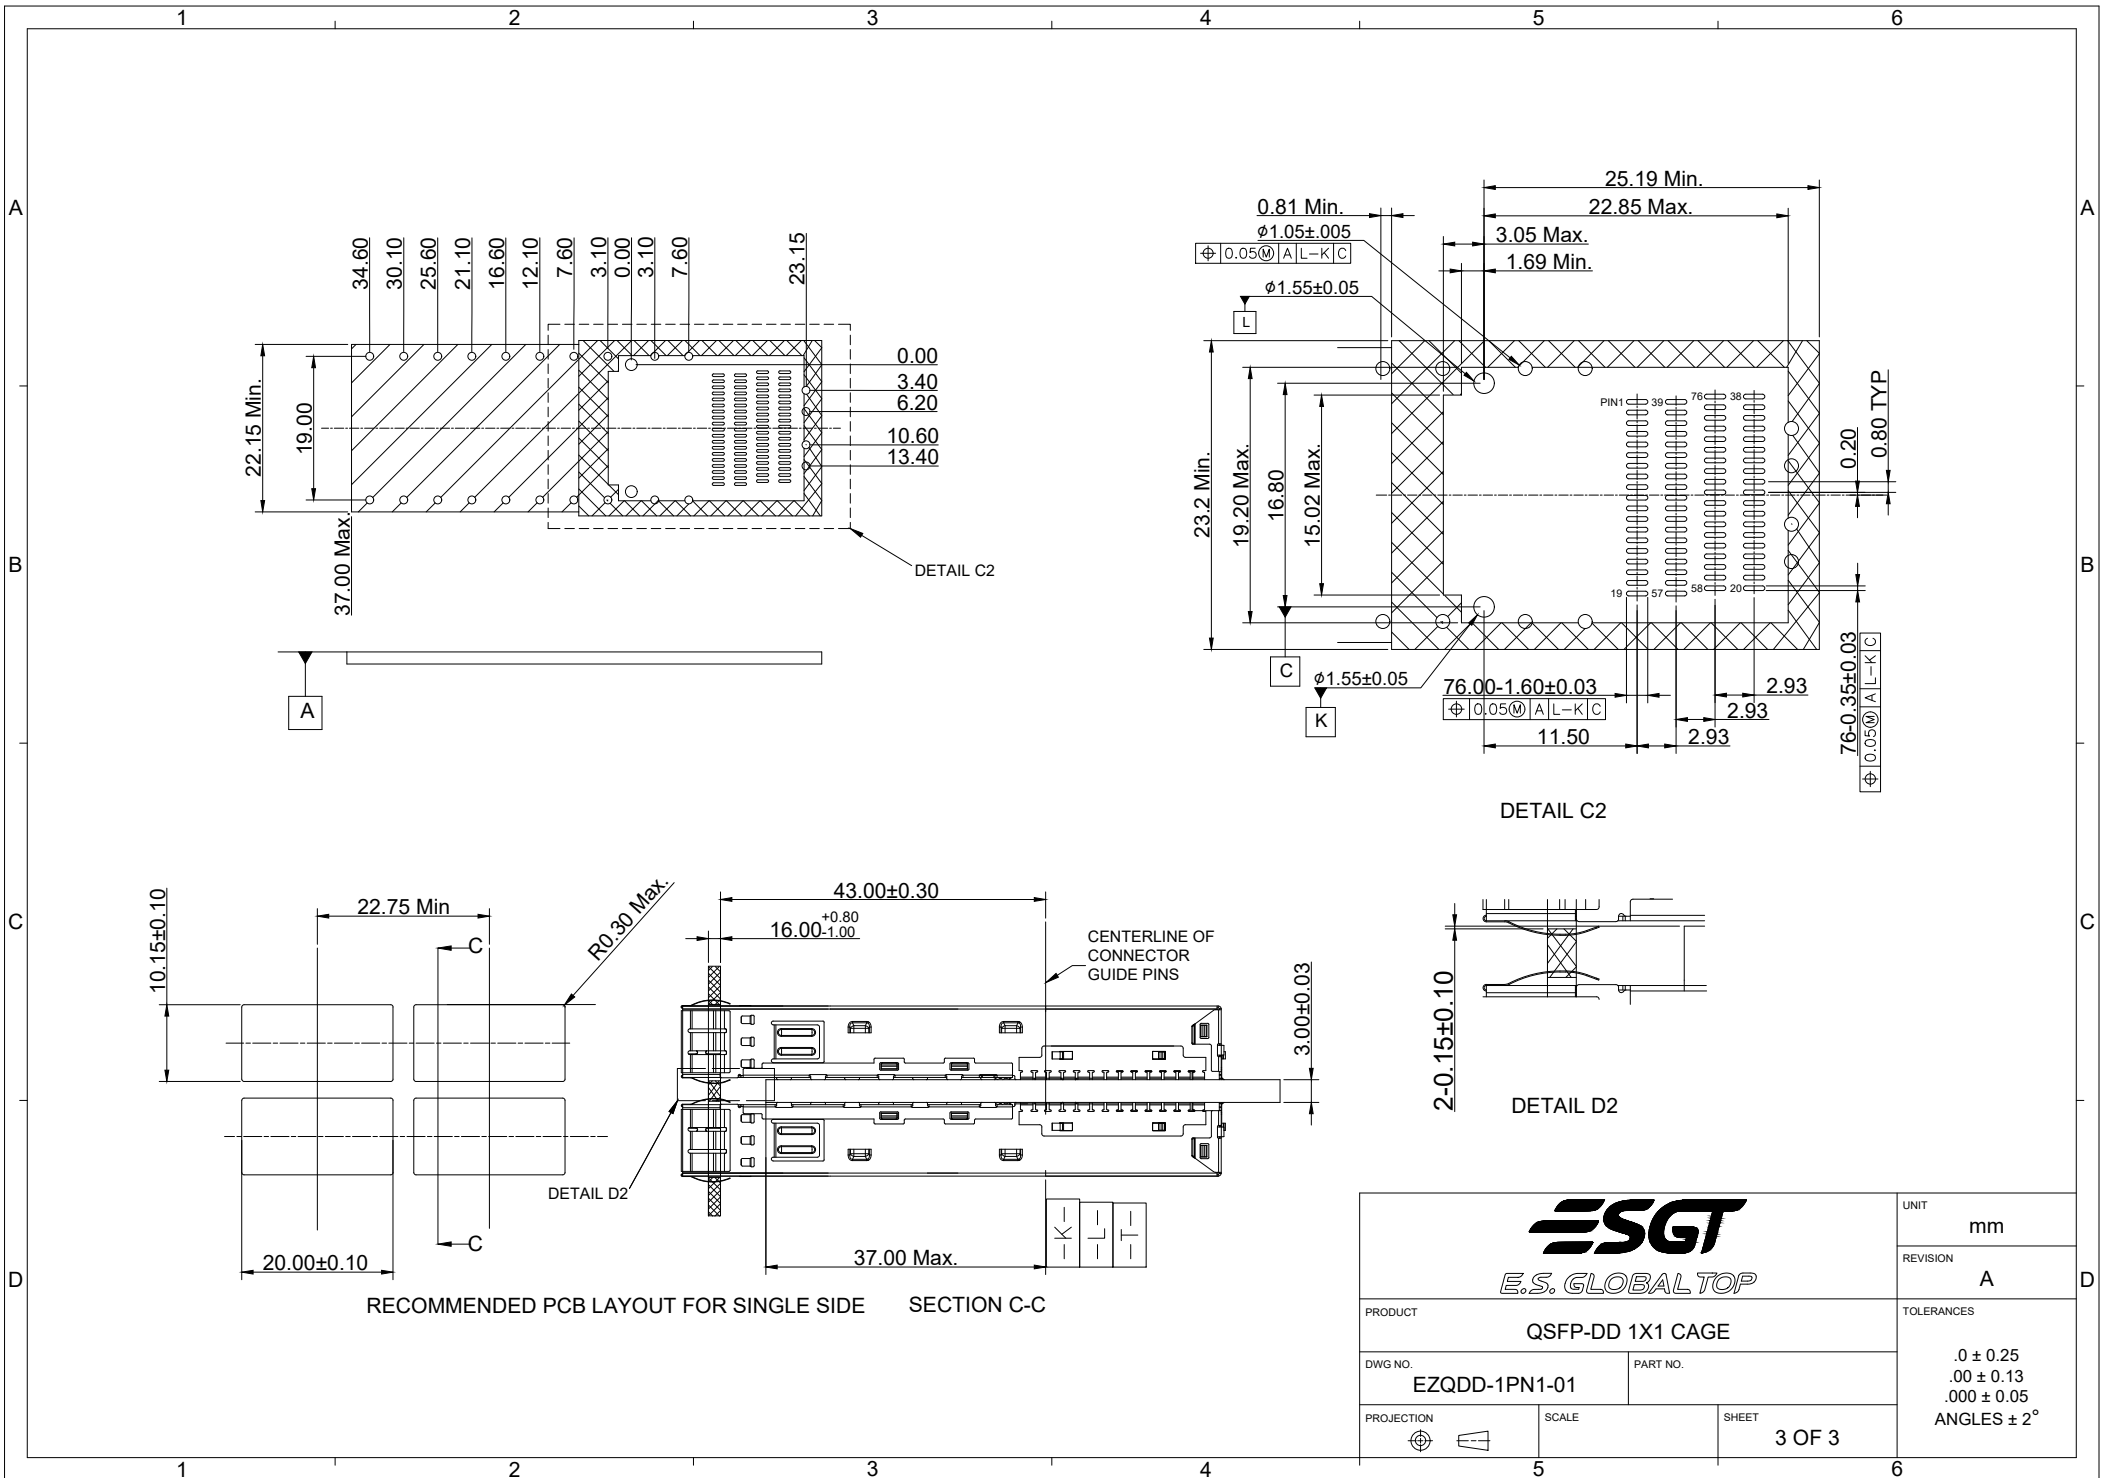

RECOMMENDED PCB LAYOUT FOR SINGLE SIDE SECTION C-C

		UNIT	mm
		REVISION	A
PRODUCT		QSFP-DD 1X1 CAGE	
DWG NO.		PART NO.	
EZQDD-1PN1-01			
PROJECTION	SCALE	SHEET	3 OF 3
		TOLERANCES	
		.0 ± 0.25	
		.00 ± 0.13	
		.000 ± 0.05	
		ANGLES ± 2°	