



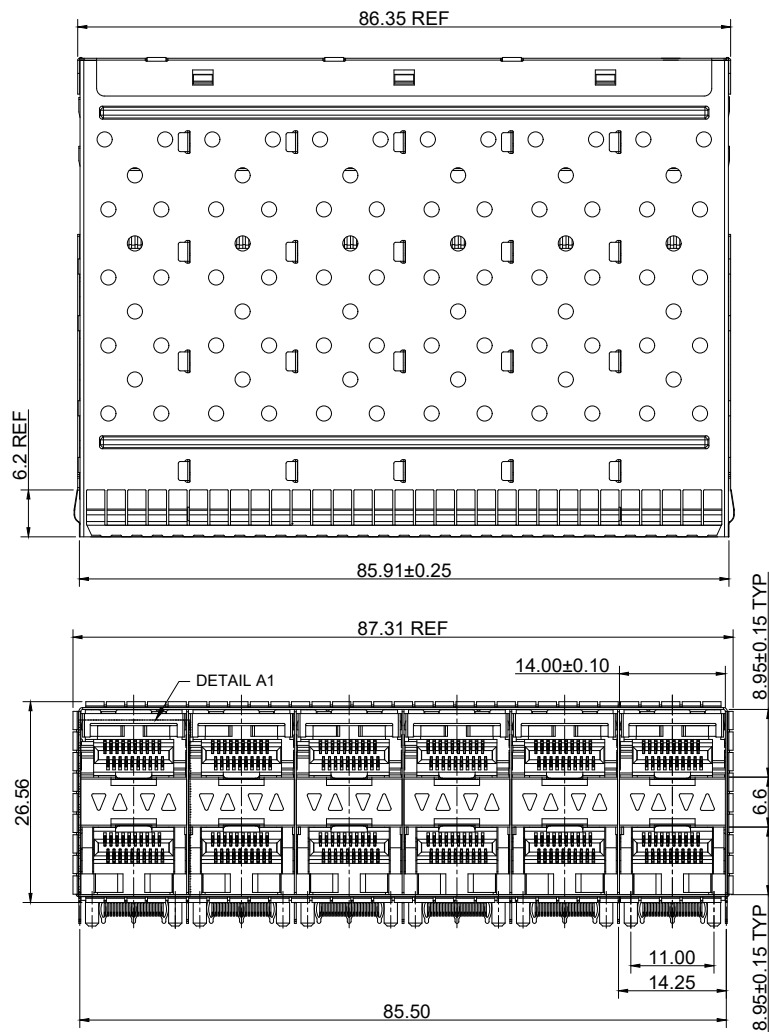




NOTES:

HOUSING	: LCP UL94V-0 BLACK
INSERT	: THERMOPLASTIC UL94V-0 BLACK
CONTACT	: PHOSPHOR BRONZE
CAGE	: COPPER ALLOY
LIGHT PIPES	: POLYCARBONATE UL94V-0
LIGHT PIPE HOUSING	: PBT UL94V-0 BLACK
CONTACT MATING AREA	: GOLD PLATING OVER 1.27µm Min. NICKEL


CONNECTER PRESS-FIT PINS	: 2.54µm Min. MATTE TIN
	: OVER 1.27 µm Min. NICKEL
INSERTION FORCE	: 40N Max.
EXTRACTION FORCE	: 12.5N Max.
DURABILITY	: 100 CYCLES MIN.
LOW LEVEL CONTACT	: ΔR 10 MΩ Max. FOR SHIELD AND
RESISTANCE (LLCR)	SIGNAL CONTACTS
DIELECTRIC WITHSTANDING	: 300V AC Max.
INSULATION RESISTANCE	: 1x10 ⁹ OHMS Min.
OPERATION TEMPERATURE	: -40°C~+85°C
STORAGE TEMPERATURE	: -55°C~+105°C
CURRENT RATING	: 0.5 AMPS Max.
VOLTAGE RATING	: 30V DC OR AC RMS. Max.

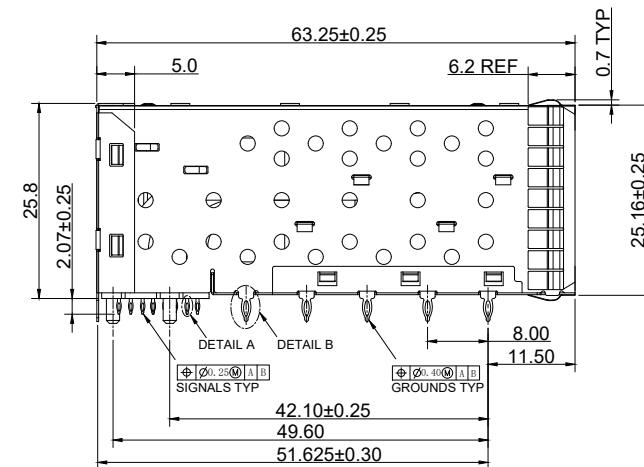


 E.S. GLOBAL TOP			UNIT mm	D
			REVISION F	
PRODUCT SFP+ 2x6 CAGE			TOLERANCES .0 ± 0.25 .00 ± 0.13 .000 ± 0.10 ANGLES ± 2°	
DWG NO. EZSP-26N21-01		PART NO.		
PROJECTION 	SCALE	SHEET 1 OF 4		
5			6	

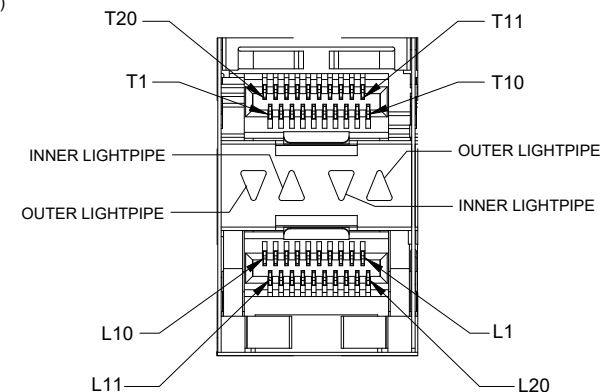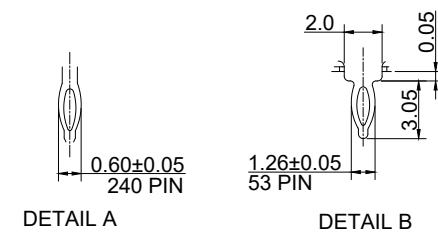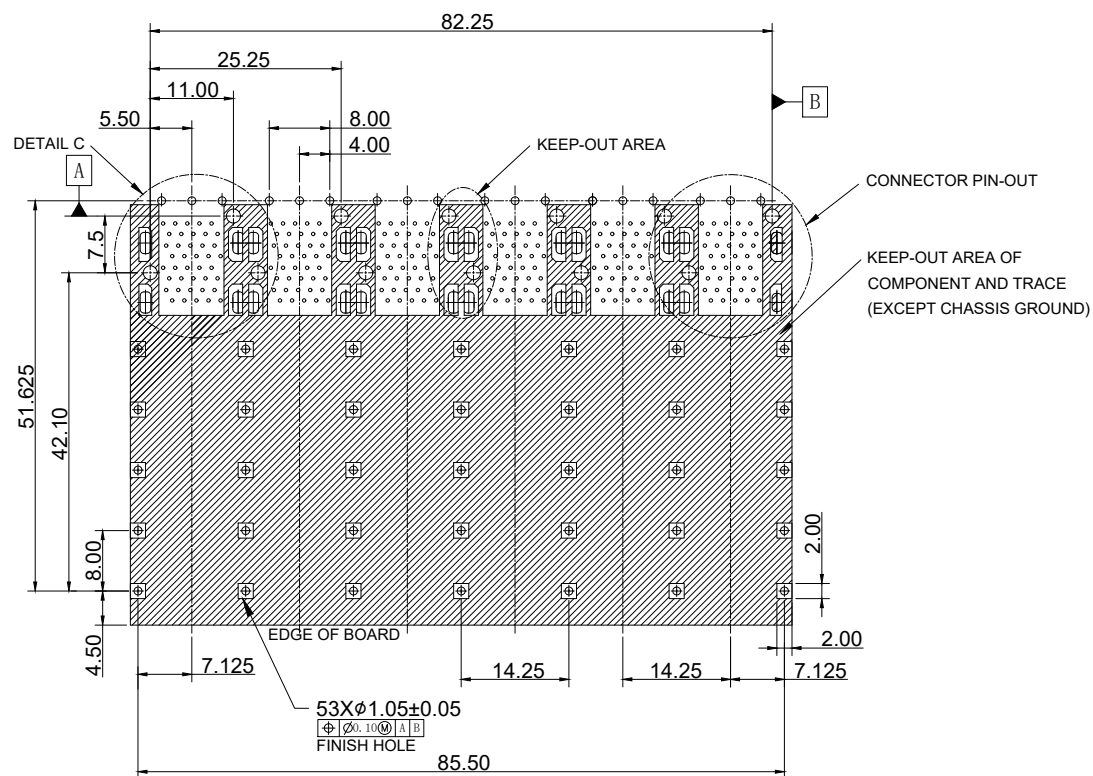


 <i>E.S. GLOBAL TOP</i>				UNIT	mm
				REVISION	F
PRODUCT				TOLERANCES .0 ± 0.25 .00 ± 0.13 .000 ± 0.10 ANGLES ± 2°	
SFP+ 2x6 CAGE					
DWG NO.		PART NO.			
EZSP-26N21-01					
PROJECTION		SCALE		SHEET	
				2 OF 4	
5				6	

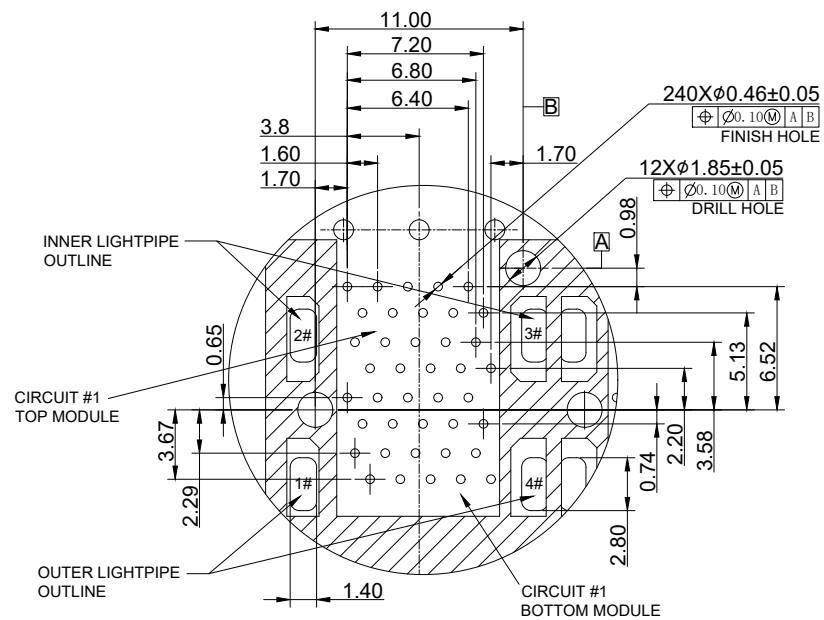

DETAIL C

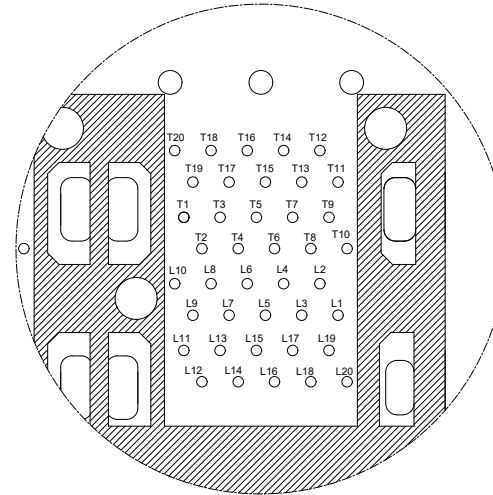


CONNECTOR PIN-OUT


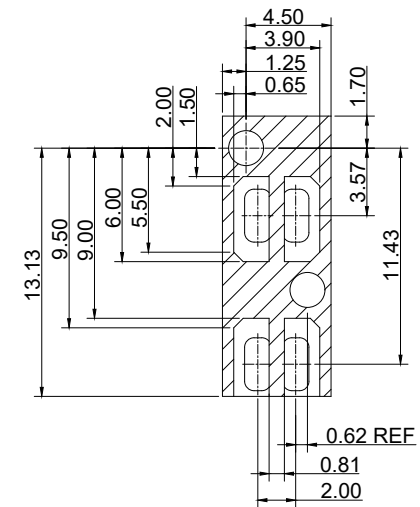


KEEP-OUT AREA

 <i>E.S. GLOBAL TOP</i>			UNIT mm
			REVISION F
PRODUCT SFP+ 2x6 CAGE			TOLERANCES .0 ± 0.25 .00 ± 0.13 .000 ± 0.10 ANGLES ± 2°
DWG NO. EZSP-26N21-01		PART NO.	
PROJECTION 	SCALE	SHEET 3 OF 4	
5		6	

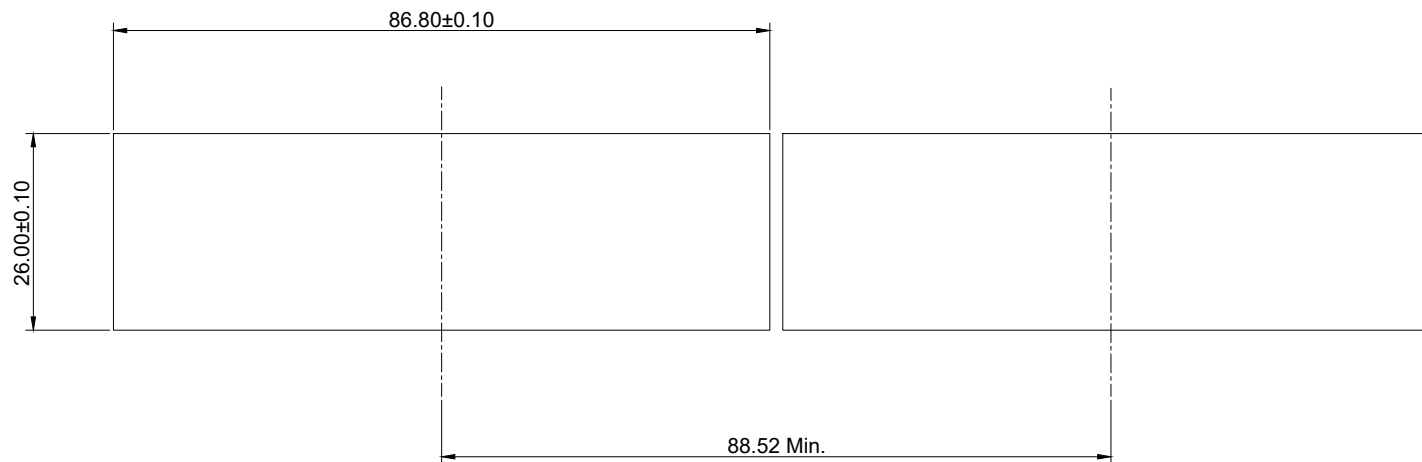

RECOMMENDED PANEL OPENING

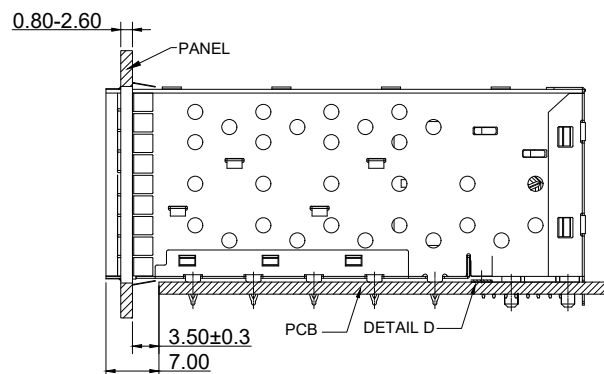

DETAIL D

 <i>E.S. GLOBAL TOP</i>			UNIT mm
			REVISION F
PRODUCT SFP+ 2x6 CAGE			TOLERANCES .0 ± 0.25 .00 ± 0.13 .000 ± 0.10 ANGLES ± 2°
DWG NO. EZSP-26N21-01		PART NO.	
PROJECTION 	SCALE	SHEET 4 OF 4	
5		6	