


RECOMMENDED PCB LAYOUT

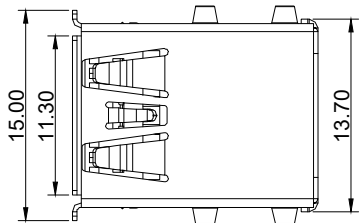

- NOTES:
- MECHANICAL**
 - HOUSING : PA46 UL94V-0 BLUE
 - BACK PLUG : PA46 UL94V-0 BLUE
 - 4P CONTACT : C5191R-H GOLD PLATING
 - 5P CONTACT : C2680R-H GOLD PLATING
 - SHELL : C2680R-H NICKEL PLATING
 - MIDDLE SHELL : SUS304
 - BACK COVER : C2680H
 - MATING FORCE : 3.57kgf Max.
 - UNMATING FORCE : 1.02kgf Min.
 - RETENTION FORCE : 1.02kgf/PIN
 - ELECTRICAL**
 - VOLTAGE RATING : 30V AC
 - CURRENT RATING : 1AMP
 - CONTACT RESISTANCE : 30mΩ Max.
 - INSULATION RESISTANCE : 1000MΩ Min.
 - DIELECTRIC STRENGTH : 500V AC
 - ENVIRONMENTAL**
 - TEMPERATURE RANGE : -40°C~+60°C

		UNIT	mm
		REVISION	A-0
PRODUCT		TOLERANCES	
USB 3.0 TYPE A DUAL PORTS		0. ± 0.38	
DWG NO.	PART NO.	.0 ± 0.25	
EZU30A-2DS1-01		.00 ± 0.20	
PROJECTION	SCALE	.000 ± 0.10	
		0.° ± 4°	
	SHEET	.0° ± 2°	
	1 OF 1		